



HLS-110-SEQ Phase Sequence / Loss Meter

Switchboard Meters



Features

- Standard 4.5" switchboard case.
- Front panel mount.
- 3 input voltage ranges.
- 3 LED indicators for L1, L2 and L3.
- 2 LED indicators for correct (1-2-3) and incorrect (3-2-1).
- Customer logos and custom artwork available on dialface.
- Available options include panel gaskets and traceable calibration.


Specifications

Input Voltage:	88-132VAC or 160-240VAC or 320-480VAC.
Overload:	N/A.
Frequency:	Range 35 ~ 70Hz.
Scale:	1-2-3+ Correct / Incorrect.
Phase LED's (Amber):	> 88VAC (SEQ1) or > 160VAC (SEQ2) or > 320VAC (SEQ3).
Correct LED (Green):	Proper Phase Sequence.
Incorrect LED (Red):	Improper Phase Sequence


Ordering Information

HLS-110-SEQ1	3 Phase 88-132VAC	L1-L2-L3	Correct/ Incorrect
HLS-110-SEQ2	3 Phase 160-240VAC	L1-L2-L3	Correct/ Incorrect
HLS-110-SEQ3	3 Phase 320-480VAC	L1-L2-L3	Correct/ Incorrect

Wiring

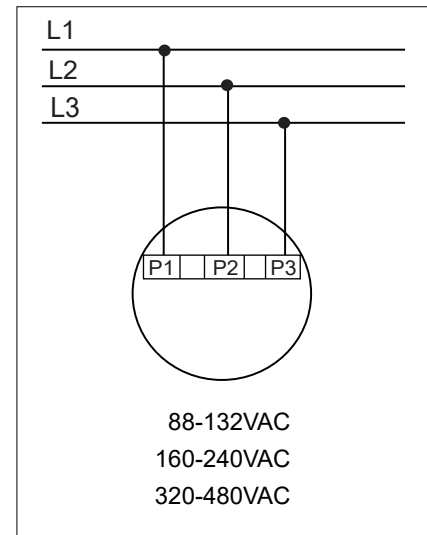

Dimensions

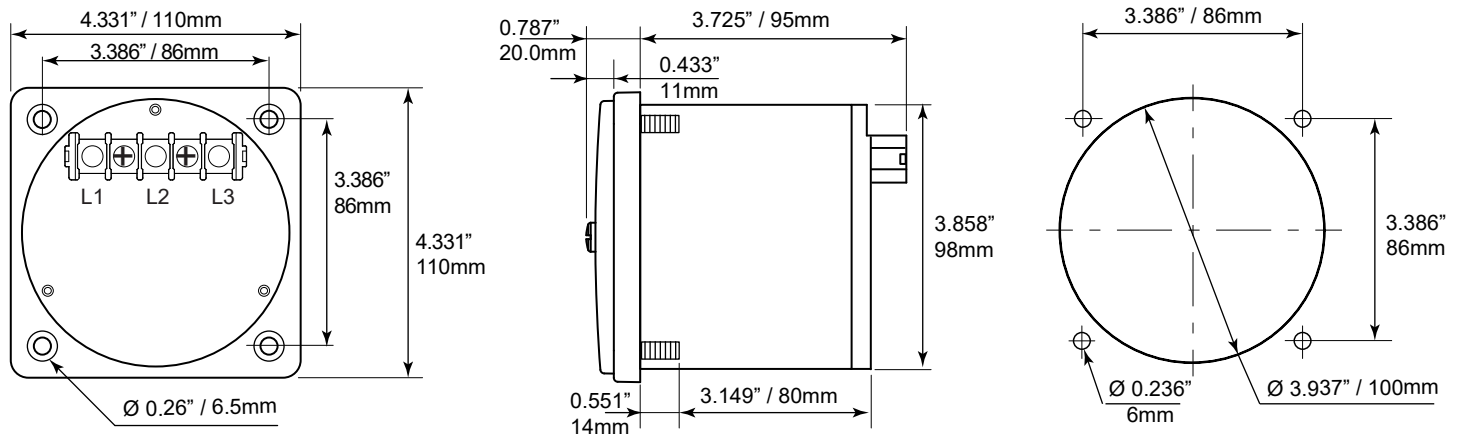

PANEL CUT-OUT