



DLA-30-DCV-200 DC Voltmeter

Digital Panel Meters



Digital DC Voltmeter with 3.5 digit red high intensity LED.

Range: 0-199 VDC.

Marine – Ideal for ship to shore panels.

Generators – Ideal for generator panels.

Specifications

Display

Numeral size: 0.56" red high Intensity digits with terminal blocks (isolated design)

Polarity: automatic, "-" displayed

Overrange: three lower order digits blank for inputs > 1999 & < -1999

Performance:

Range: 0-199 VDC.

Auxiliary Power: 12-24 VDC.

Accuracy: $\pm(0.05\% \text{ FS} + 1 \text{ count})$.

Sample rate: 3 readings per second.

Field adjustable: single turn potentiometer for calibration.

Warm-up: 10 minutes typical.

Temperature coeff.: $\pm 100 \text{ ppm per } ^\circ\text{C}$ typical.

Power Supply Voltage: 12-24 VDC.

Environment:


Operating temperature: -10 to 50 °C

Storage temperature: -40 to 75 °C.


Connection:

Terminal Block Connections. Spade terminals.

DC Volts

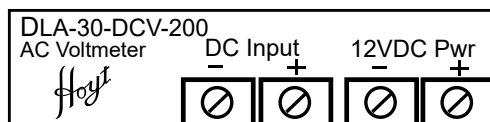

Range: 0 - 99.9VDC or 0 - 199VDC (Specify)

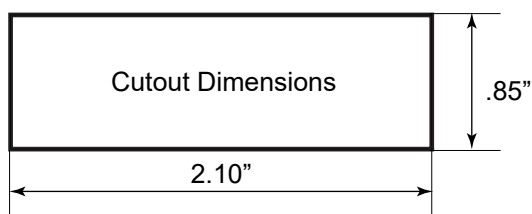

NOTE: manufactured part numbers have changed. DMC-30-DCV-200 has been replaced by DLA-30-DCV-200