



Model 1021 TK

Electrical Test Kit



2950 CL AC CLAMP METER (with DCV function)


- 1000A AC measurement.
- Pocket size.
- 4000 counts.
- Full automatic measurement:
 - Voltage measurement.
 - Current measurement.
 - Resistor measurement.
- Data hold function.
- Continuity check.
- Diode measurement.
- Select function.
- Low battery indication.
- Auto off function.
- Flashlight (auto off in 1 minute).

ALS-2 AC LINE SEPARATOR

- Use with any clamp meter.
- x10 mode allows for more accurate measurements of low amperage devices.
- x1 mode allows for direct reading .
- 4mm voltmeter input jacks.
- Integrated ground conductor.
- 10 amp capacity.
- 10cm plug cord for greater flexibility.



1021 TK package.

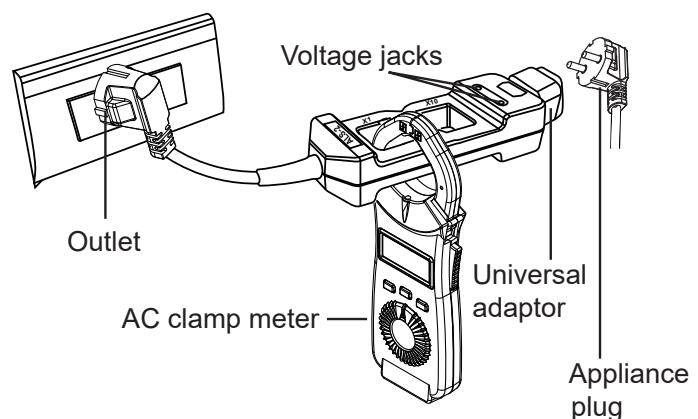

Use with any Clamp meter




Model 1021 TK

Electrical Test Kit

Specifications

2950 CL

ACA	40.00A 400.0 / 1000A
ACV	4.000 / 40.00 / 400.0 / 750V
DCV	4.000 / 40.00 / 400.0 / 1000V
Resistance	400.0Ω / 4.000kΩ / 40.00kΩ / 400.0kΩ / 4.000MΩ / 40.00MΩ
Continuity	Threshold level (beep sound) : less than 25Ω
Overload protection	AC V : 750Vrms DC V : 1000V Diode & ohm : 250Vrms
Conductor size	35mm Max.
Low battery indication	 Sign appears on the display
Response time	Approx. 2 times per second

General

Operating temperature & humidity	0°C ~ 40°C 80% R.H. Max.
Storage temperature & humidity	-10°C ~ 50°C 80% R.H. Max.
Battery life	Approx. 100 hours on continuous use
Dimensions	183(L) × 62(W) × 20(D)mm
Weight (battery included)	Approx. 123g
Power source	CR 2032 (DC 3V) × 1
Safety standard	EN 61010-1 CAT II 600V CAT III 300V EN 61010-2-32 EN 61326-1

ALS-2

Input plug	Europe
Output socket	3 prong U.S. standard
Cord length	10 cm
Max. voltage / ampere rating	250Vac(±10%) / 10Aac
Operating temperature & relative humidity	0°C ~ 50°C Max. 80% R.H.
Weight	Approx. 135g
Dimensions	145(L) × 55(W) × 35(D)mm



ALS-2 is available with types E, G, I plugs.
It also includes a universal adapter.

One hand operation with 2950 CL .

Accessories

- Instruction manual
- Test leads
- Soft pouch
- Battery

