



AL-24-X Series

Test Leads



Specifications

- Wire: PVC UL 1803 / 18AWG.
Length: 1100±30mm
Out diameter: 3.50mm
Temperature tolerance range: -40°C~105°C
Braid copper wires: 64 / 0.12mm
- Terminal: Right angle 4mm brass (nickel plated) banana plug with caged and insulated sheathing to avoid the brass oxidation.
- Rating: EN 61010-031:2002+A1:2008
CAT III 1000V 10A / CAT IV 600V 10A


Patented connector at test lead and terminal

Test leads for meters and testers are highly susceptible to poor contact and damage.

Our patented screw end has completely offset the bending oppression, which makes it highly durable and long lasting.

Patent No: U.S.A US 6,265,668 BI, GERMANY 299 12 812 • 1, CHINA ZL 99 2 16904 • 6.

Dimensions

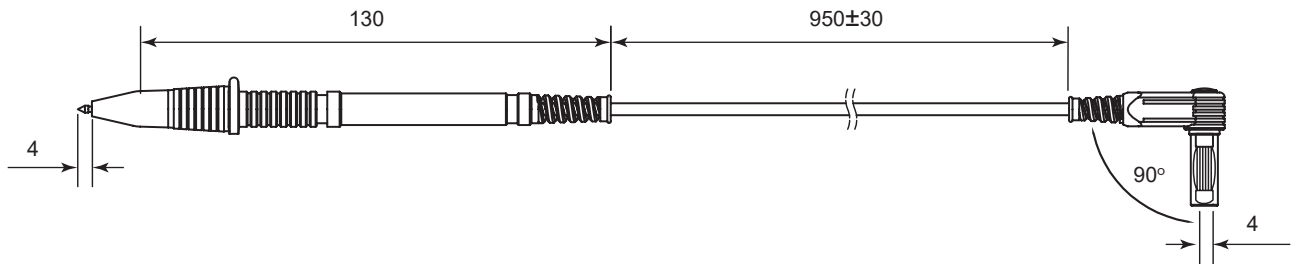

With cap, CAT III 1000V / CAT IV 600V



AL-24-1



AL-24-3



AL-24-5

Without cap, CAT II 1000V (can be used with alligator clips)



AL-24-1



AL-24-3



AL-24-5