



AL-28-X Series


Test Leads



Specifications

- Wire: PVC UL 1803 / 18AWG.
Length: 1100 ± 30 mm
Out diameter : 4.0mm
Temperature tolerance range : $-40^{\circ}\text{C} \sim 105^{\circ}\text{C}$
Braid copper wires : 170 / 0.08mm
- Terminal : 4mm with brass nickel plated
- Rating : EN 61010-031:2002 + A1:2008
CAT IV 1000V 10A

Dimensions

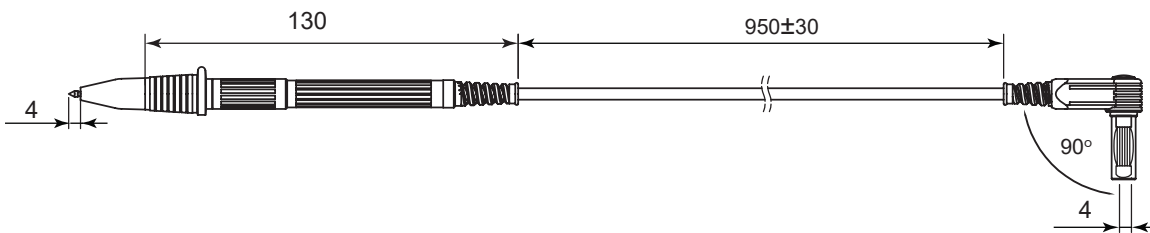

With cap, CAT IV 1000V



AL-28-1



AL-28-3



AL-28-5

Without cap, CAT II 1000V (can be used with alligator clips)



AL-28-1



AL-28-3



AL-28-5