




# AL-37U24-X

## Test Leads

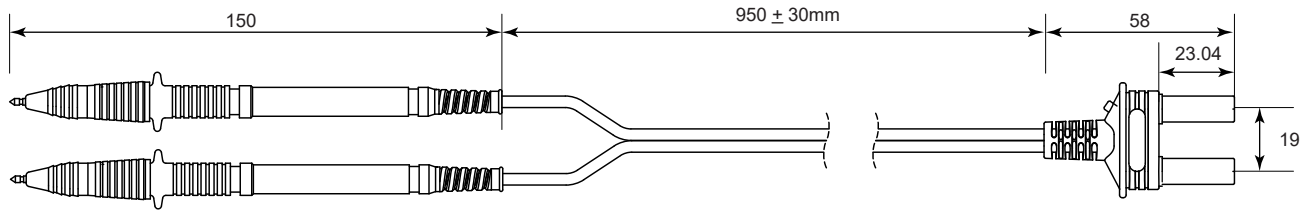

Patented connector at test lead and terminal

Test leads for meters and testers are highly susceptible to poor contact and damage.

Our patented screw end has completely offset the bending oppression, which makes it highly durable and long lasting.

• Patent No.

U.S.A US 6,265,668 B1

GERMANY 299 12 812 • 1

CHINA ZL 99 2 16904 • 6



### Specifications

- Wire : PVC UL 1803 / 18AWG.  
length : 1100±30mm  
Out diameter : 3.50mm  
Temperature tolerance range : -40°C~105°C  
Braid copper wires : 64 / 0.12mm
- Terminal :  
(1) Single test plug for 2 test leads.  
(2) Single test plug for easier operation.
- Rating :  
EN 61010-031:2002 + A1:2008  
CAT III 1000V 10A / CAT IV 600V 10A

### With cap, CAT III 1000V / CAT IV 600V



### Without cap, CAT II 1000V (can be used with alligator clips)

