


• Single test plug

Specifications

- Wire : PVC UL 1803 / 18AWG.
Length : 1100±30mm
Out diameter : 4.0mm
Temperature tolerance range : -40°C~105°C
Braid copper wires : 170 / 0.08mm
- Terminal :
(1) Single test plug for 2 test leads.
(2) Single test plug for easier operation.
- Rating :
EN 61010-031:2002 + A1:2008
CCAT IV 1000V 10A


With cap, CAT IV 1000V

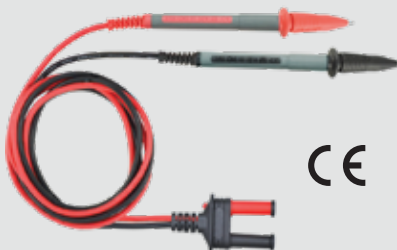

AL-37U28-1




AL-37U28-3

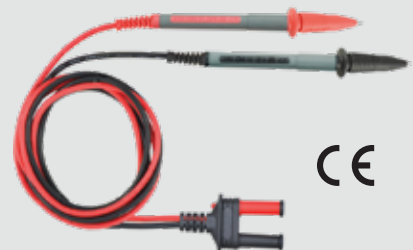


AL-37U28-5


Without cap, CAT II 1000V (can be used with alligator clips)

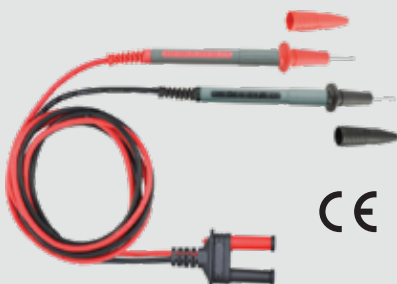

AL-37U28-1

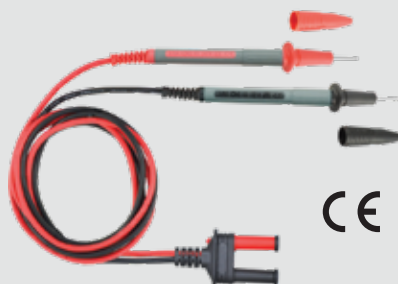

AL-37U28-1

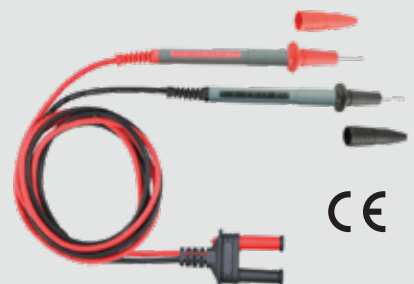

AL-37U28-1