



Model 302 SVD

Safety Voltage Detector




- Bright LED visual indication
- Audible indication
- Easy-to-prove method
- Self-test function
- Non-contact detection by proximity
- Convenient to use
- Lightweight, robust and compact
- Easy access to batteries.

302 SVD is an instrument designed to alert users that they are approaching live equipment where dangerous voltage is present. The safety voltage detector helps the user stay a safe distance away from live equipment. It therefore protects and safeguards users from approaching dangerous live high voltage equipment or cables. It's a new tool for checking the presence of AC high voltages and low voltages. The voltage detection is from 100Vac to 50kVac.

Specifications

AC Voltage detection	100Vac ~ 50kVac
Frequency range	50/60 Hz
Operating temperature and humidity	0°C ~ 40°C / 80% R.H. Max.
Sound level	> 99 dB
Weight (battery included)	Approx. 205g
Dimension	107(L) x 73(W) x 33(D)mm
Power source	1.5V (AA) x 3(Alkaline battery)
Safety standard	EN 61326-1


The ideal detection angle

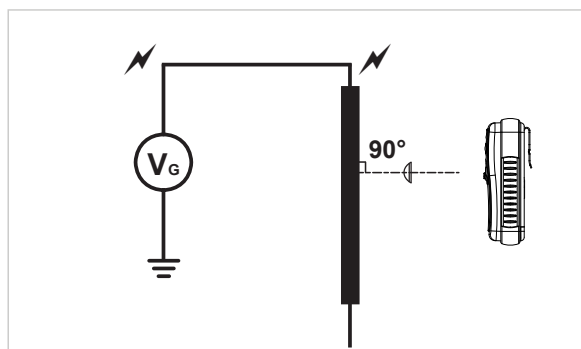

- ① Buzzer:
High noise level buzzer triggered on voltage detection.
- ② Visual alert LED
- ③ ON/OFF switch
- ④ Self Test button
- ⑦ Soft pouch
- ⑧ Shoulder belt
- ⑤ Clip
- ⑥ Battery cover

Accessories

Instruction Manual,
Soft pouch,
Batteries.

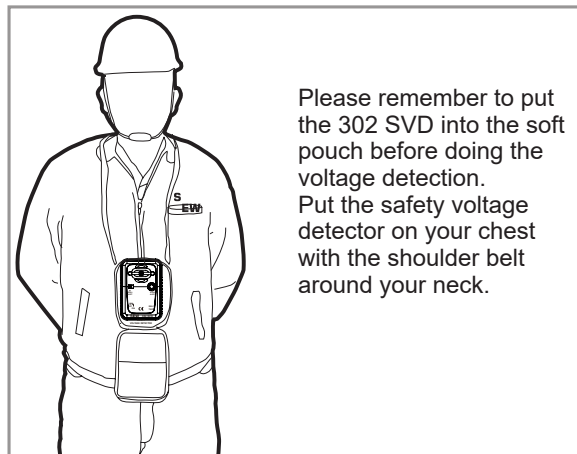

Please remember to put the 302 SVD into the soft pouch before doing the voltage detection. Put the safety voltage detector on your chest with the shoulder belt around your neck.